

Electric Antenna Stand EAS 365-15kg

Technical Data

Antenna height adjustable manually		0.7 m to 1.7 m
Total mast height		2.1 m
Load capability	max.	15 kg (when balanced)
For long and heavy antennas a counter weight is required to balancing the load Depending on the distance of the antenna centre of gravity		
Material		Plastic + reinforced fibreglass,
Mast cross-section		100 mm x 100 mm
Base L x W		0.9 m x 0.75 m
Moveable with 4 casters		
Electrical Polarisation		between 0° to 365°
Polarisation accuracy		± 1°
Motor		Brushless DC motor 200 W
Interference suppression:		20 dB under limits EN 55022 class B
Current consumption	max.	2A
Voltage		208-230 VAC, 50/60 Hz, single phase
Discharge current		25mA per drive unit (higher in the moment when powering on)
Control cable		Fibre optic lines
Remote control via		IEEE interface
Antenna support drive		2 toothed belts
Material of toothed belts		Kevlar reinforced (non-metallic)
Temperature range		+10 °C...+35 °C
Total weight	approx.	45 kg
Accessories		Interface to SCU/MCU/NCD Controller 1.5 m power supply cable Service manual

Brief description


The Electric Antenna Stand **EAS 365-15kg** is specifically designed for measurements in electromagnetic absorption chambers at a fixed measuring height. Other fixed antenna heights are available upon request.

The antenna mast, with the exception of the drive unit, is fabricated from plastic (PVC and reinforced fibreglass). Metal parts are located only in the base plate and the drive mechanism (max. 0.3 m above ground level).

Antenna Adapters for all commercially available antennas are available upon request.
All antennas during polarisation rotate around their axis to eliminate any elevation errors.

The **IEEE 488.2 (GPIB) bus** provides an additional control option for all functions, when operated with the **SCU/MCU or NCD Controller**.

Electric Antenna Stand EAS 365-15kg

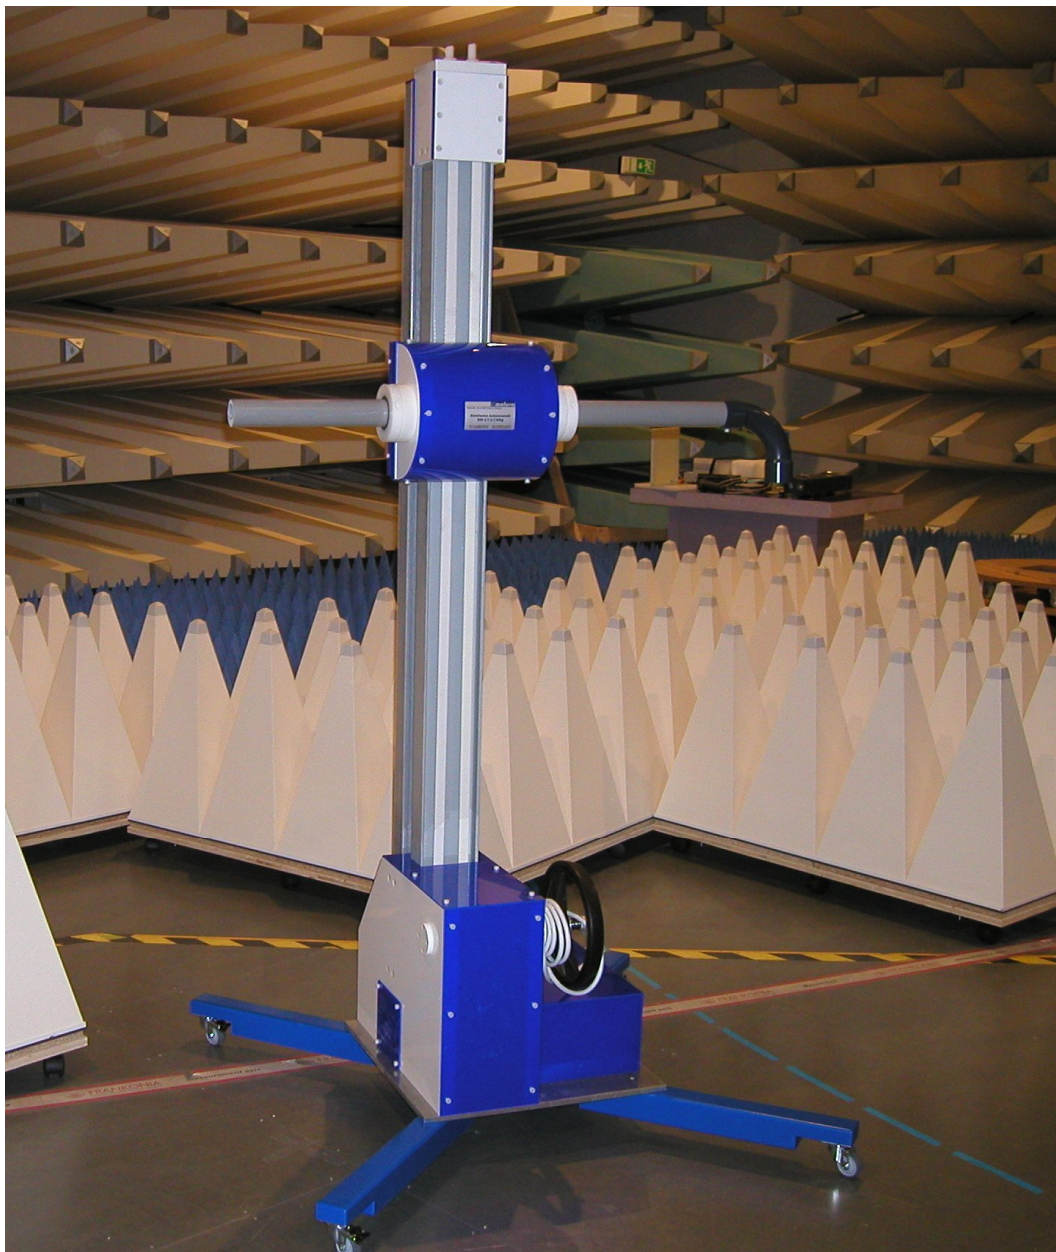

Information presented enclosed is subject to change as product enhancements are made regularly. Pictures included are for illustration purposes only and do not represent all possible configurations.