

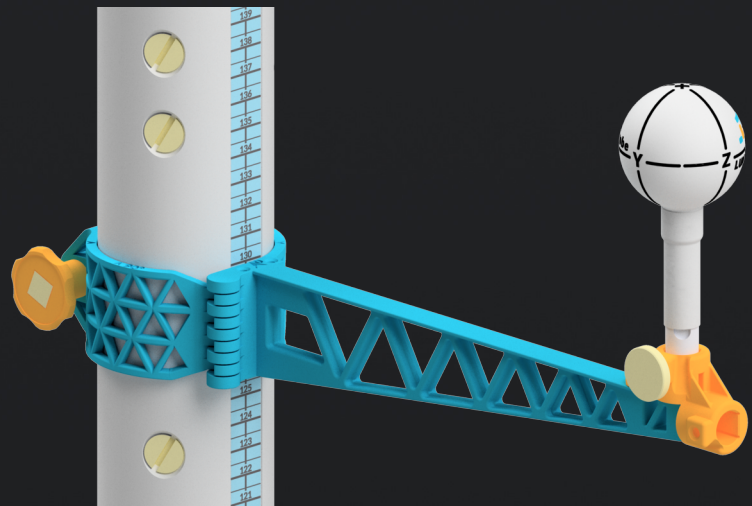


LUMILOOP


LSProbe Floor Probe Stand

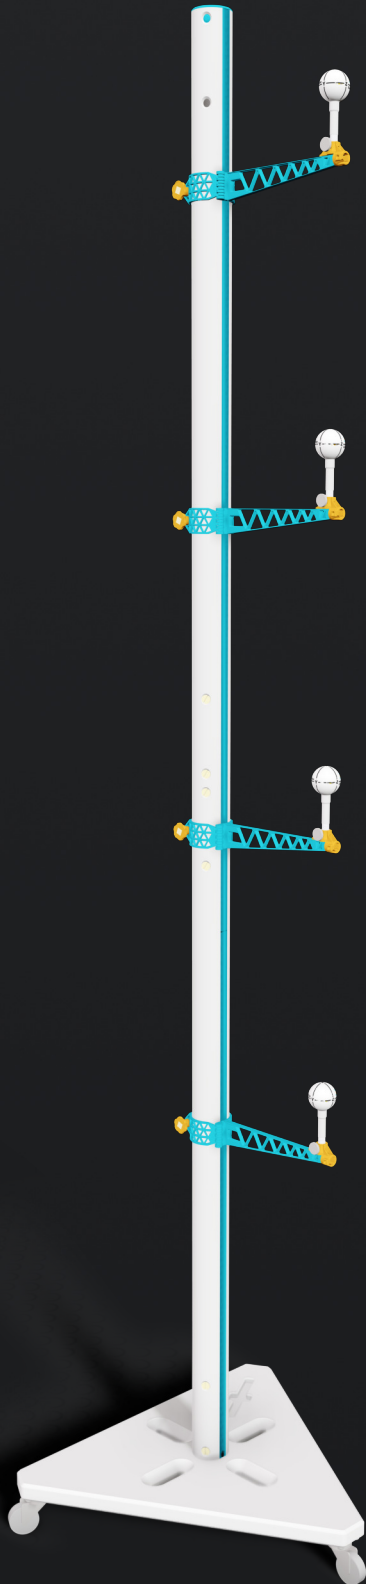

Single Probe Holder

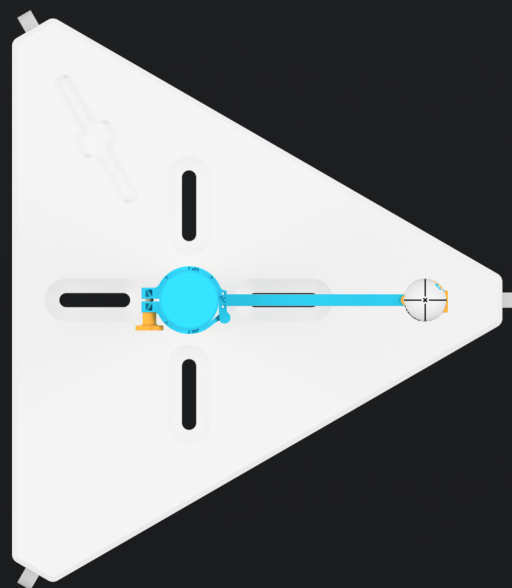

Top View

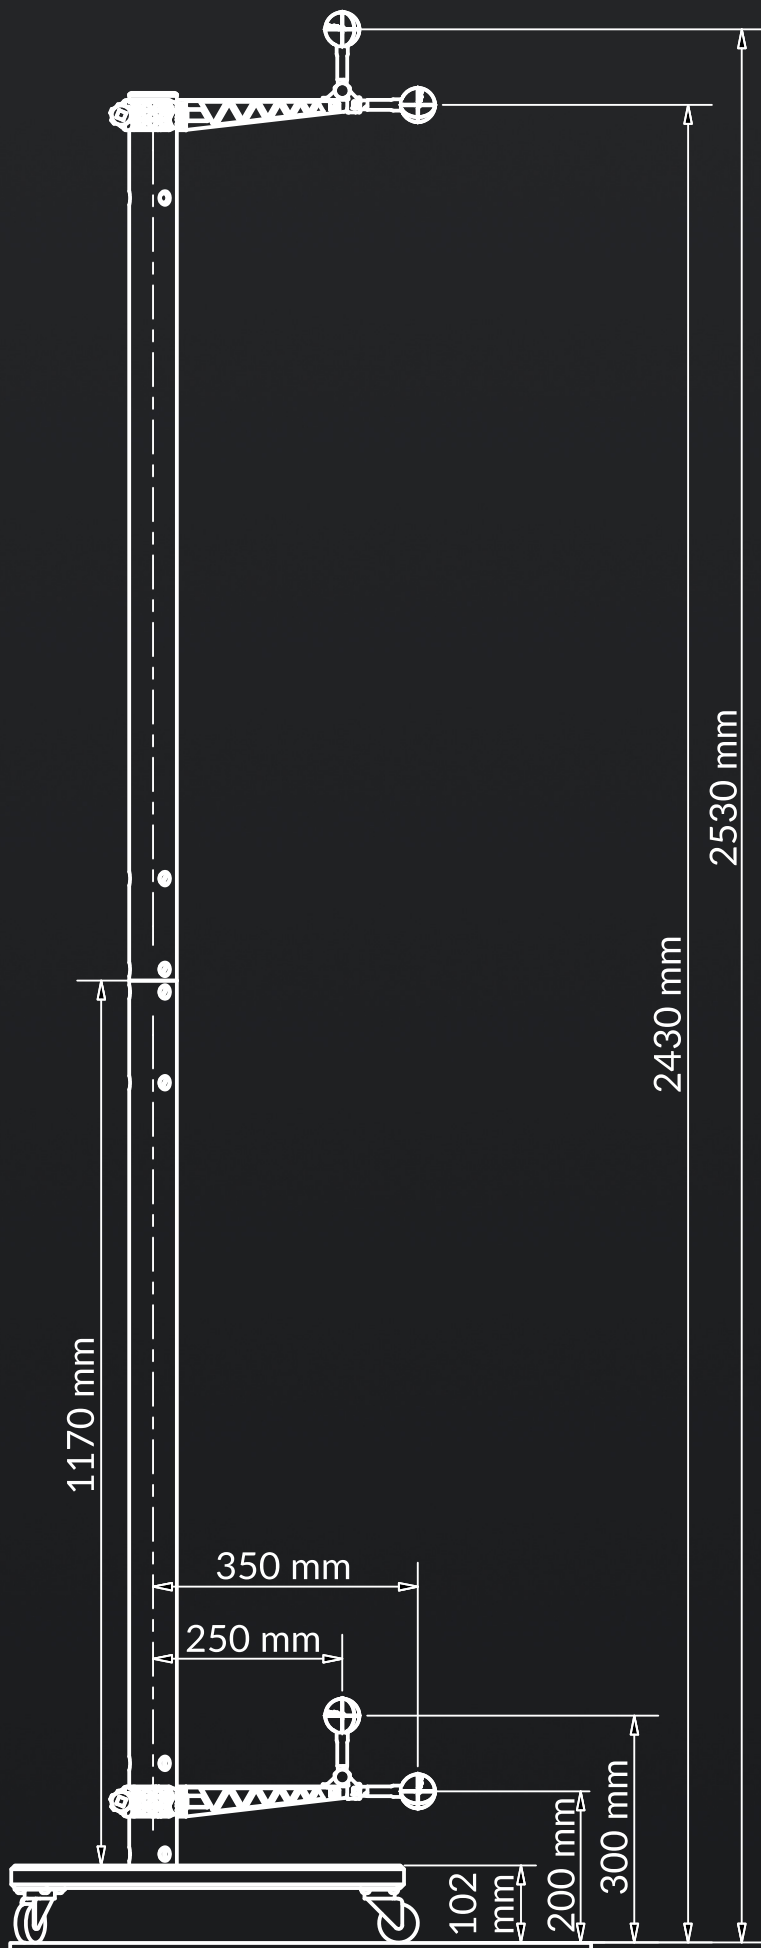

Features

- optimized for IEC 61000-4-3 16 point field homogeneity validation
- metal-free base and pole
- no directional reflection from round pole
- ruler shows LSProbe height above ground
- lockable swivel castors
- base features slots for repeated alignment (matching Edding 3000 pen included)

Probe Holder

- lightweight construction
- low RF absorption
- mountable at any angle
- two mounting positions for LSProbe

Materials

- PVC (base plate, poles, connector)
- PA, porous (probe holder)
- PA (screws)
- metal, rubber (swivel castors)

Dimensions


- pole height: 2450 mm above ground
- weight: 12 kg

Scope of Delivery

- base plate, two poles, connector
- one probe holder
- all necessary assembly parts

Optional Accessories

- further single probe holders
- holder for three probes in one level, according to ISO 11451-2

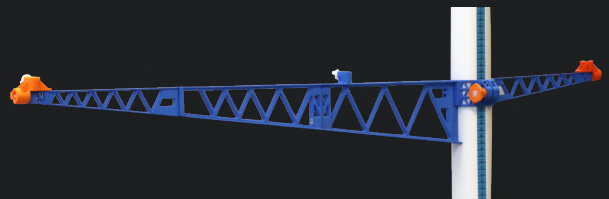

LUMILOOP GmbH

Gostritzer Str. 63
01217 Dresden, Germany
Phone: +49 (0)351 85097870
E-mail: info@lumiloop.de

www.lumiloop.de

Gefördert durch:



Bundesministerium
für Wirtschaft
und Energie



EUROPÄISCHE UNION

aufgrund eines Beschlusses
des Deutschen Bundestages



Existenzgründungen
aus der Wissenschaft